




LOFT LADDER

FEATURES

- 1 Flick Fit installation - Pre installed brackets for installation from below
- 2 Continuous seal around trapdoor reduces heat loss
- 3 Pre-fitted handrail as standard
- 4 White 36mm thick insulated trapdoor, with U-Value of 1.1w/m²k as standard*
- 5 Unique detachable ladder - enables one person to install
- 6 Recessed locking system
- 7 Slip resistant treads
- 8 Dove tail joints on all treads
- 9 Scratch resistant protective feet

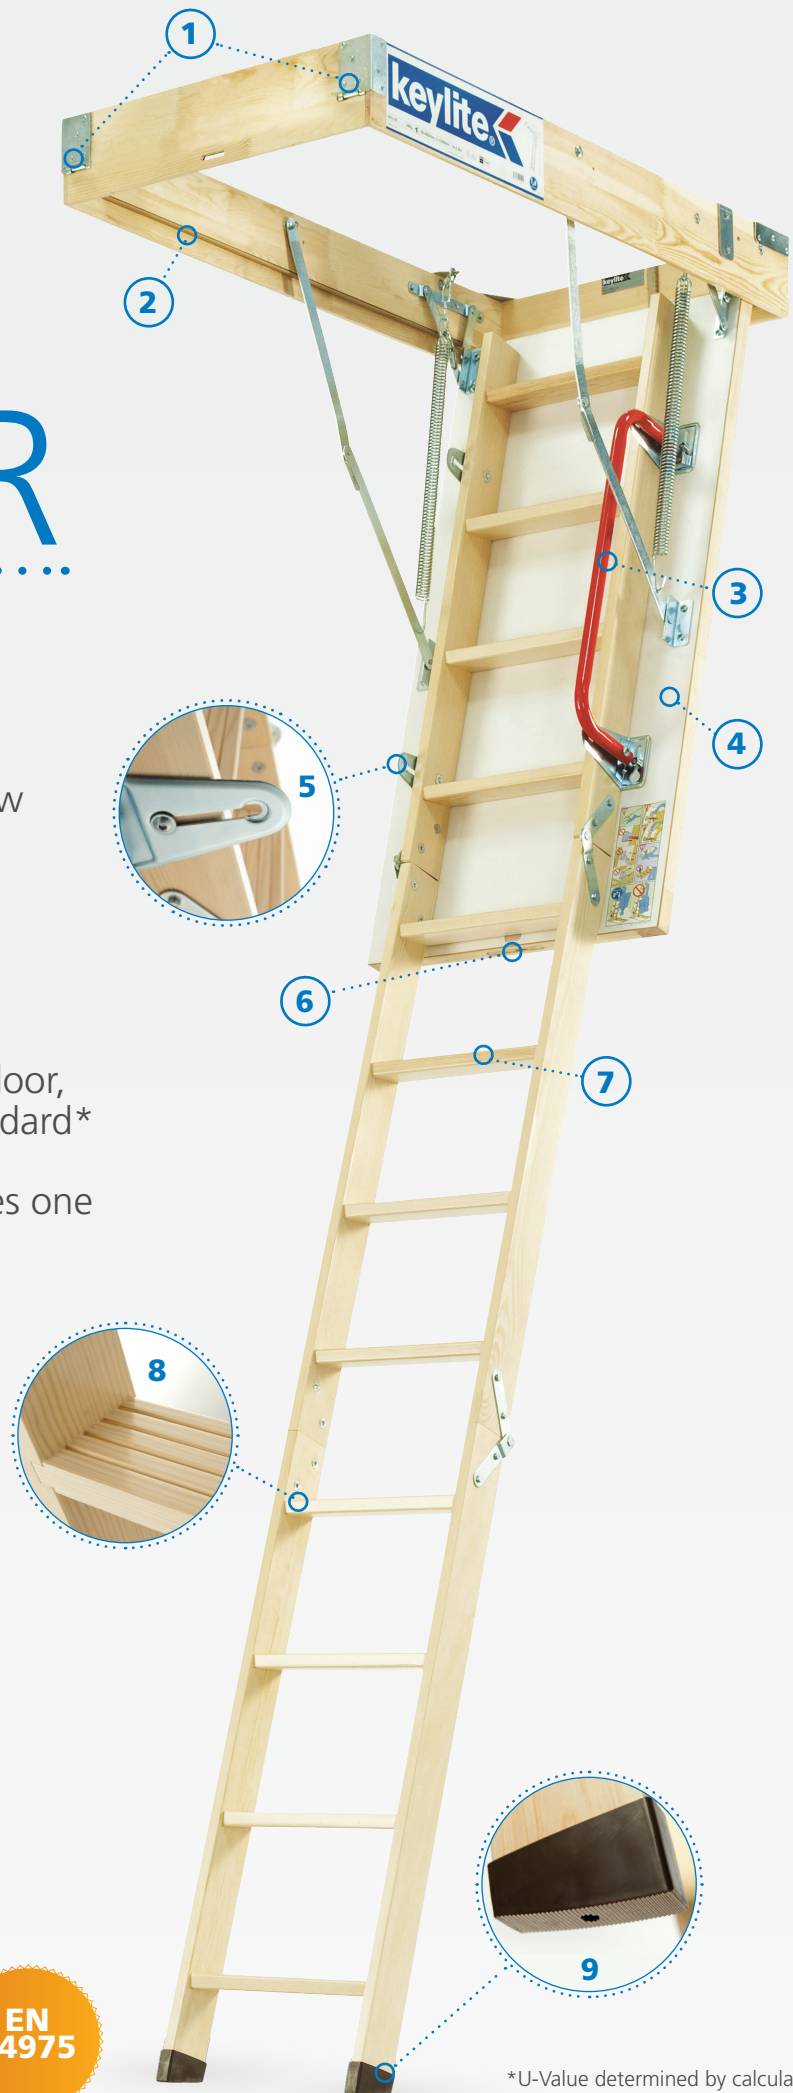

3 Year 
Guarantee



The mark of
responsible forestry
FSC® C043999





EN
14975

*U-Value determined by calculation

3 SEGMENT LADDERS

4 SEGMENT LADDERS

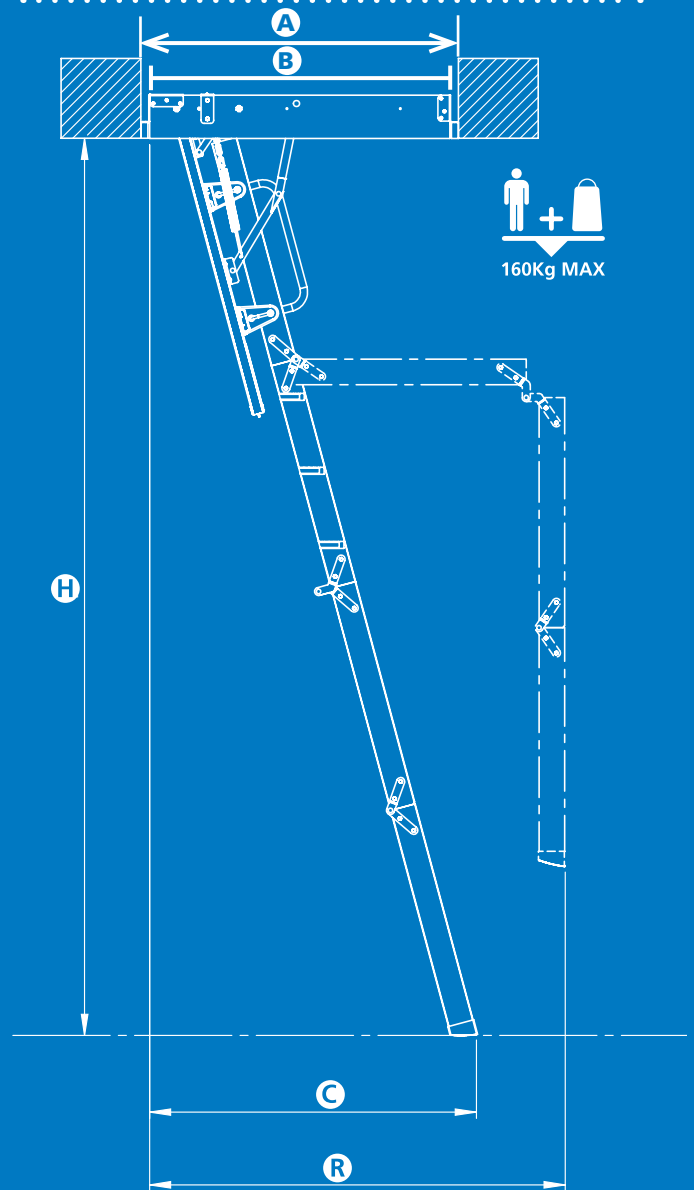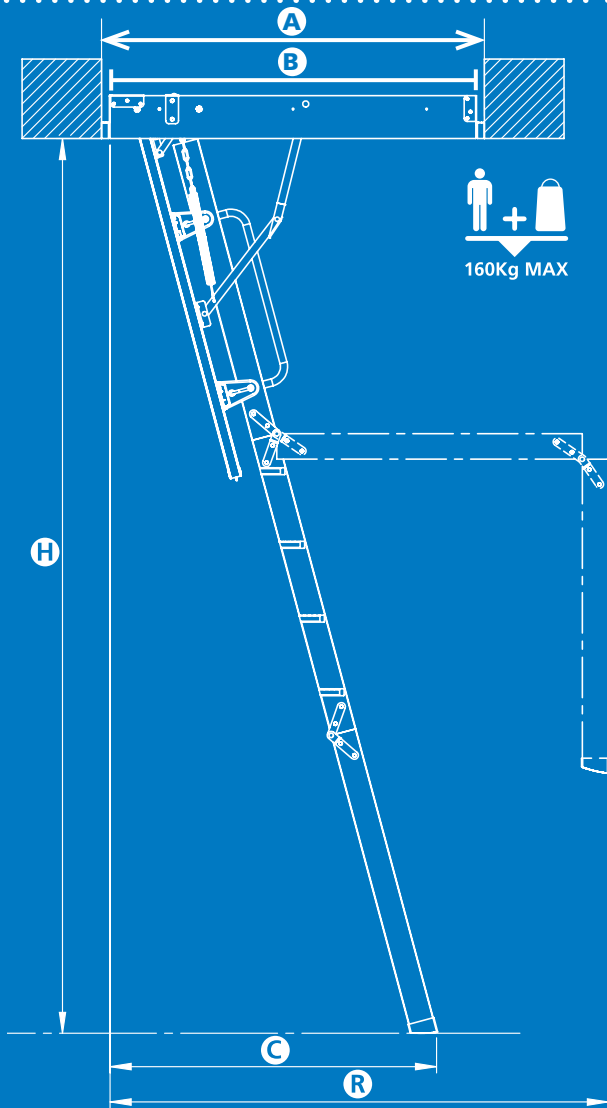

	KYL01	KYL02	KYL03	KYL04	KYL05	KYL06	KYL07	KYL08	KYL09
A Ceiling opening dimension (mm)	550 x 1000	550 x 1200	550 x 1200	600 x 1000	600 x 1200	600 x 1200	700 x 1000	700 x 1200	700 x 1200
B Frame external dimension (mm)	530 x 940	530 x 1140	530 x 1140	580 x 940	580 x 1140	580 x 1140	680 x 940	680 x 1140	680 x 1140
Number of ladder sections	4	3	4	4	3	4	4	3	4
C (mm)	1025	1025	1145	1025	1025	1145	1025	1025	1145
R (mm)	1300	1565	1605	1300	1565	1605	1300	1565	1605
H (mm)	2800	2800	3200	2800	2800	3200	2800	2,8	3200



Keylite Roof Windows Ltd. (NI)
Derryloran Industrial Estate,
Sandholes Road, Cookstown,
Co. Tyrone, BT80 9LU

T: +44 (0)28 8675 8921
F: +44 (0)28 8675 8923
E: info@keylite.co.uk

Keylite Roof Windows Ltd. (GB)
Ryder Close,
Cadley Hill Industrial Estate,
Swadlincote, South Derbyshire,
DE11 9EU

T: +44 (0)1283 200 150
F: +44 (0)1283 223 352
E: info@keyliteuk.com