


Modern and precisely engineered, Raylux is the ideal affordable solution for any project.


The blend of optimal functionality with easy installation makes it suitable for both new build and refurb projects. Featuring high performance materials with exceptional functionality – create light and welcoming spaces with this highly adaptable, affordable and aesthetically pleasing rooflight.

Sleek and stylish, the frame of the Raylux unit is available from stock in the current colour of choice – anthracite grey, or white. You can be assured that comfort and safety go hand in hand with superior non-fragility ratings and excellent thermal properties.

With 252 different configurations, you can be confident that you will find a suitable specification for your new build or refurbishment project. The fixed, manual or electric ventilation options will ensure a comfortable environment whenever Raylux Glass is installed. Be the envy of your friends with our smart home app, or go with our cost-effective, standard comfort controls.

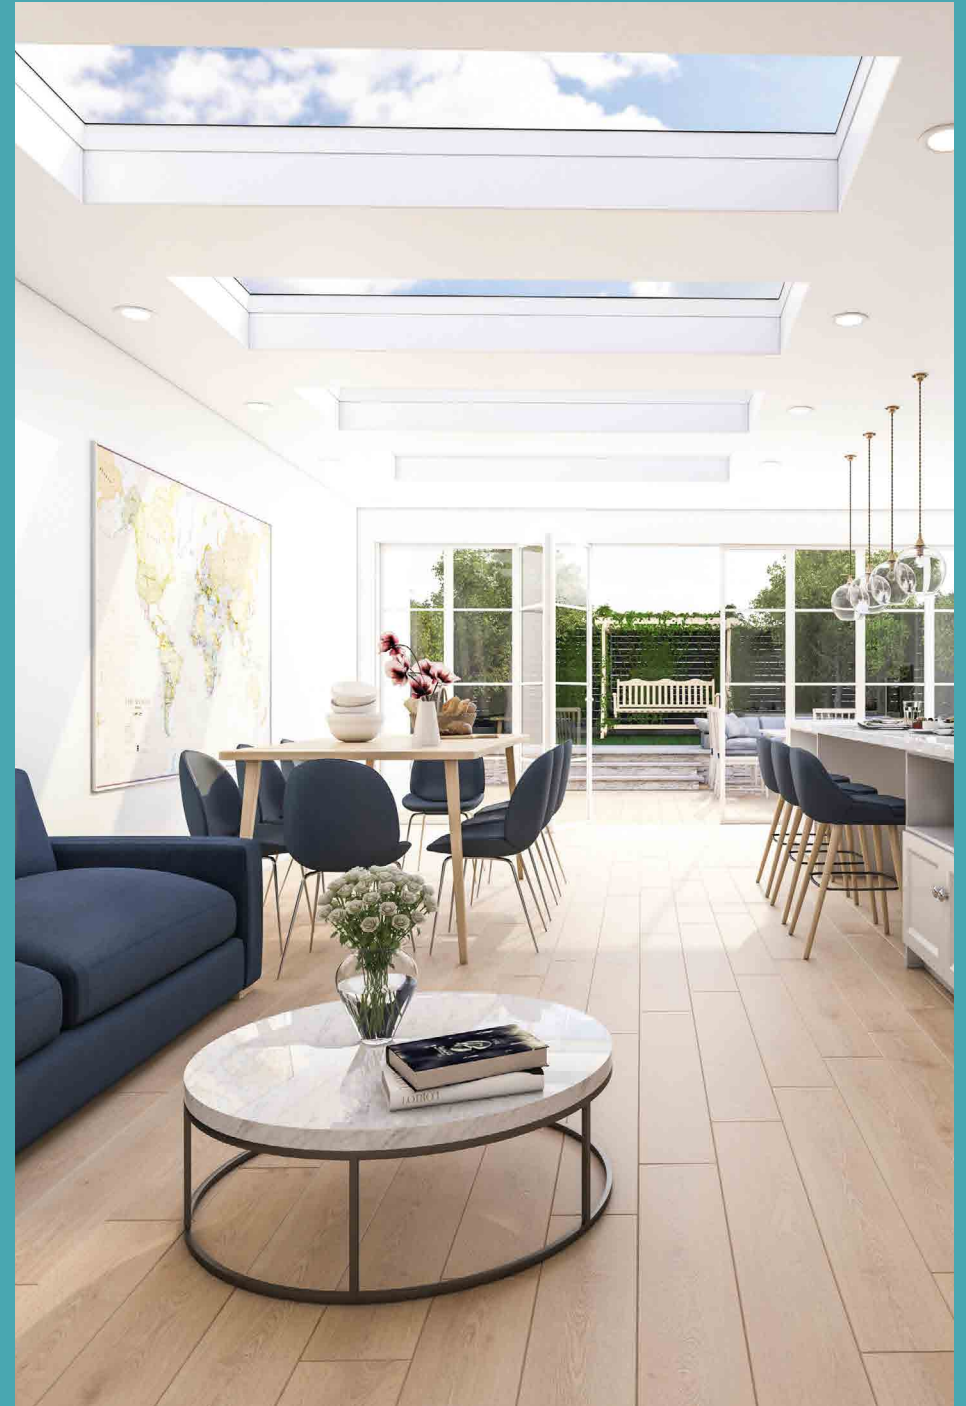


Colours & glazing

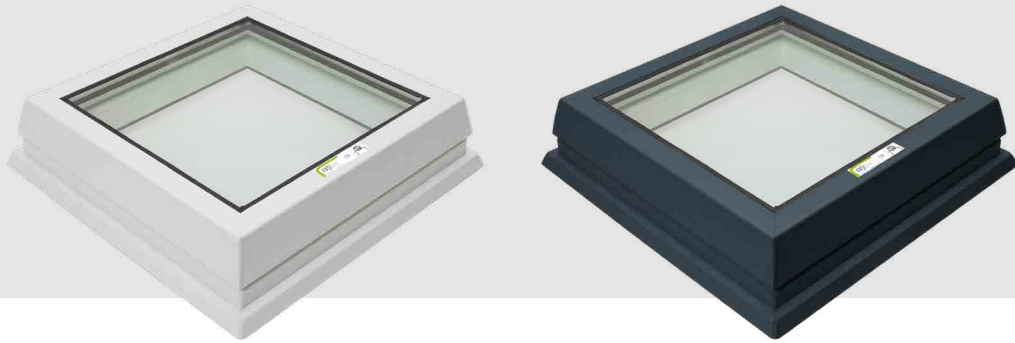

RAL 9010
white

RAL 7016
anthracite grey

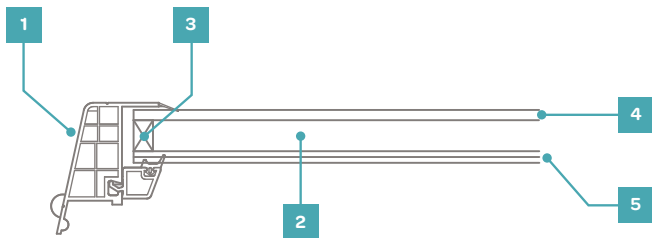

1	Frame	PVC
2	Gas	Argon
3	Warm spacer	✓
4	Toughened outer pane	✓
5	Laminated inner pane	✓
	Install pitch (upstand)	5-15°
	External frame colour	RAL 7016 anthracite grey RAL 9010 white
	U-Value	1.26W/m²K

Sizes & upstands

- Thermally broken upstands, incorporating fixing flange
- Installation options available to suit either a site-formed builder's upstand, or proprietary insulated upstands with vertical sides.
- Proprietary upstands are 150mm high, meeting the minimum requirements for building regulations

💡 Can be fitted to builder's upstand – unique to the Raylux Glass.

Builder's upstand



External curb size

PVC 150mm upstand



Roof opening size

Size ref	To suit external upstand size (mm) A
----------	--------------------------------------

Square	RX S2	600 x 600
	RX S4	700 x 700
	RX S5	800 x 800
	RX S7	900 x 900
	RX S8	1000 x 1000
	RX S9	1100 x 1100
	RX S11	1300 x 1300

Rectangular	RX R5	700 x 1000
	RX R6	700 x 1300
	RX R7	800 x 1100
	RX R16	1000 x 1300
	RX R17a	1100 x 1600
	RX R19	1100 x 2100
	RX R23c	1300 x 2300

Size ref	To suit roof opening size (mm) B
----------	----------------------------------

Square	RX S2	500 x 500
	RX S4	600 x 600
	RX S5	700 x 700
	RX S7	800 x 800
	RX S8	900 x 900
	RX S9	1000 x 1000
	RX S11	1200 x 1200


Rectangular	RX R5	600 x 900
	RX R6	600 x 1200
	RX R7	700 x 1000
	RX R16	900 x 1200
	RX R17a	1000 x 1500
	RX R19	1000 x 2000
	RX R23c	1200 x 2200

Ventilation

- Available as standard fixed unit
- Electrically opening units operated by 230v slimline chain actuator, powder coated to match colour of internal framework
- Manually opening units incorporate winding spindle opening to approximately 200mm

Voltage (v)	230
Power requirements (amps)	0.32
Stroke length (mm)	300
Cable requirements	3 core

Controls available – see opposite

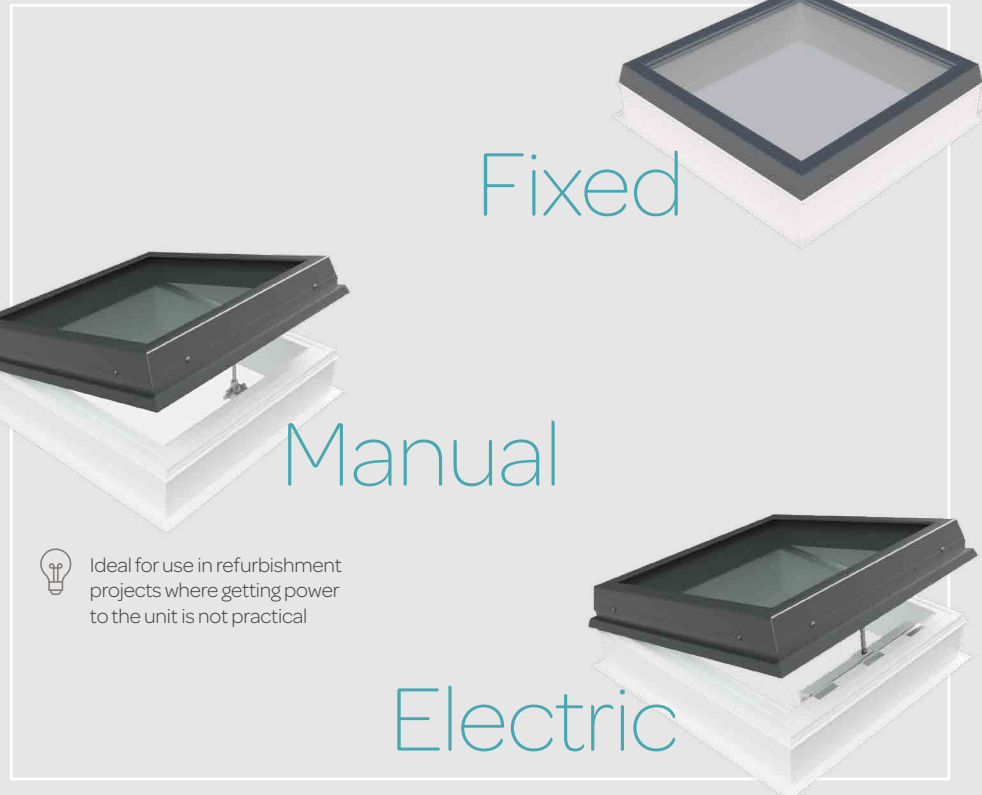

Accessories

Standard comfort controls

- For electric opening
- Option of retractive switch or comfort kit including a control panel, remote control and rain sensor



Premium comfort controls

- For electric opening
- Wireless controls which include open/close manual switch and internal and external temperature
- Wireless weather station which includes wind and rain sensor
- Option of handheld remote



Smartphone app

Fully controllable opening from your smartphone

- Remote operation
- Programmable alerts & notifications
- Can be linked to other smart home devices





Distributed by:

Tel 020 8551 5800 Fax 020 8551 0381
enquiries@loftshop.co.uk
www.loftshop.co.uk

Opening times: 08:00 - 17:00